

DOWN LIGHT





SERIES KDL-F

- ◆ High luminous efficiency, CRI>80 , suitable for project.
- ◆ Round and square for options.
- ◆ Dimensions range form 4" to 8", powers range from 9W-30W
- ◆ Lifespan up to 35,000 hours,



◆ 4" / 6" / 8"
9W / 20W / 30W

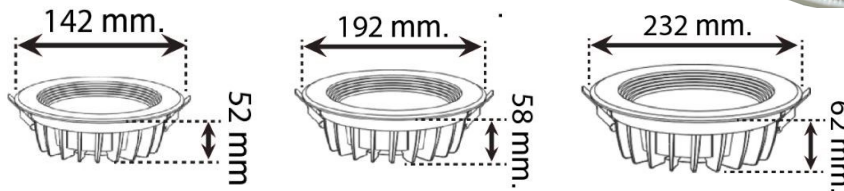

Parameter	Value		
Model	KDLF01049W	KDLF010620W	KDLF010830W
inch	4"	6"	8"
Rate Power	9W	20W	30W
Luminous Flux	765lm	1,700lm	2,550lm
Luminous Efficiency		85lm/w	
LED Chip		COB	
Color Temperature	CCT 2700K/3000K/5000K		CCT 2700K/3000K/4000K/6500K
Color Rendering Index		>80 Ra	
Input Voltage		AC 100-240VAC , 50/60Hz	
Beam Angle		60°	
Total harmonic Current		<40%	
Work Temperature		-30°C to 50°C	
Work Life		>35,000 Hours	
IP Rating		IP20	
Cover		Clear	
Cutting size (mm)	115	160	205
Dimensions (mm)	142*52	192*58	232*62

KDL-01 = DIMMABLE
KDL-02 = NON-DIM