


INDUSTRIAL LIGHT

HIGH BAY LIGHT SERIES KHBC



- ◆ Soft light with high light effect.
- ◆ Cold lighting source, no heat radiation, no harmful metal mercury, and environmental protection.
- ◆ Low power consumption, long lifespan, good stability, high reliability.
- ◆ Compared with the filament lamp of the same light effect, 80% reduction in energy consumption.
- ◆ Novel design, elegant and beautiful, with modern lighting features, easy to install and adjust.

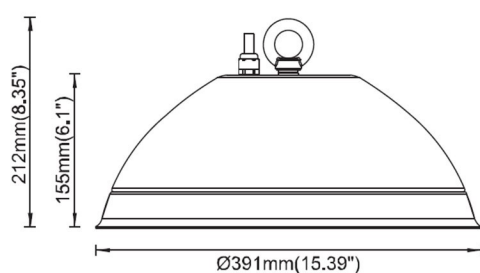

Parameter	Value			
Model	KHBC80W	KHBC100W	KHBC120W	KHBC150W
Rate Power	80W	100W	120W	150W
Luminous Flux	11,200lm	14,000lm	16,800lm	21,000lm
Luminous Efficiency	140lm/w			
Color Temperature	CCT 3000K/4000K/5000K/5700K			
Color Rendering Index	>80 Ra			
Input Voltage	AC 100-277 VAC , 50/60Hz			
Power factor	> 0.95			
Beam Angle	90°			
Work Temperature	-20°C to 50°C			
Work Life	> 50,000 Hours			
IP Rating	IP65			
Net Weight	5.78 Kg			
Dimensions	391*212 mm			

90°(Standard)

