



FLOOD LIGHT SERIES KFDM

- ◆ High pressure die-cast aluminum alloy housing.
- ◆ 25°, 40°, 60°, 90°, 145x100°, 150° optional, Uniform light distribution apply to different industrial light project.
- ◆ 180° adjusted angle available for outdoor & indoor lighting application.
- ◆ With excellent housing design reach IP66/IK10 rating.



50W—500W




HB0601-50W





HB0602-100W



HB0603-150W



HB0604-200W



Parameter	Value							
Model	KFD1MD50W	KFD2MD100W	KFD3MD150W	KFD4MD200W	KFD5MD250W	KFD6MD300W	KFD8MD400W	KFD10MD500W
Rate Power	50W	100W	150W	200W	250W	300W	400W	500W
Luminous Flux	>7,750lm	>15,500lm	>23,250lm	>31,000lm	>38,750lm	>46,500lm	>62,000lm	>77,500lm
Luminous Efficiency	155-160lm/w							
Color Temperature	CCT 3000K/4000K/5000K/6000K							
Color Rendering Index	>70 Ra							
Input Voltage	AC 100-277 V, 50/60Hz							
Power factor	> 0.95							
Beam Angle	25° / 40° / 60° / 90° / 145x100° / 150°							
Work Temperature	-40°C to 85°C							
Work Life	>50,000 Hours							
IP Rating	IP66							
Net Weight	2.5 Kg	3.6 Kg	4.0 Kg	5.0 Kg	6.0 Kg	9.0 Kg	11.0 Kg	13.0 Kg
Dimensions (mm)	260*105*195	260*168*195	260*258*195	260*348*95	438*260*195	520*258*195	520*348*195	520*438*195



INDUSTRIAL LIGHT



Application



Installation

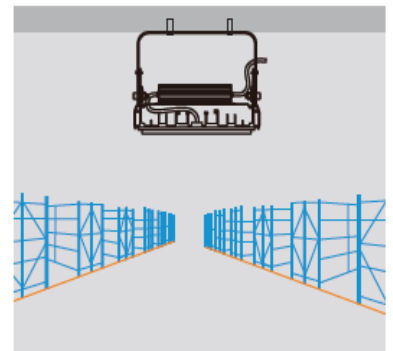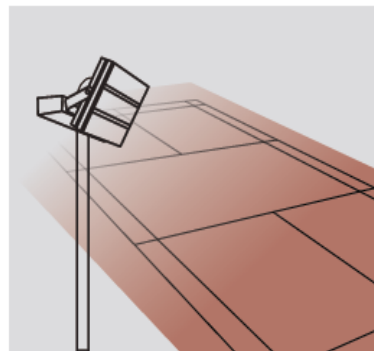

Light Distribution Curve

