


STREET LIGHT



SERIES KST-G

- ◆ Separated in build isolate driver.
- ◆ Anti-dust, Ultra slim
- ◆ Can make with photocell control if require.,
- ◆ Holder can be 50MM & 60MM.
- ◆ holder can adjust angle till 120degree.

30-150W

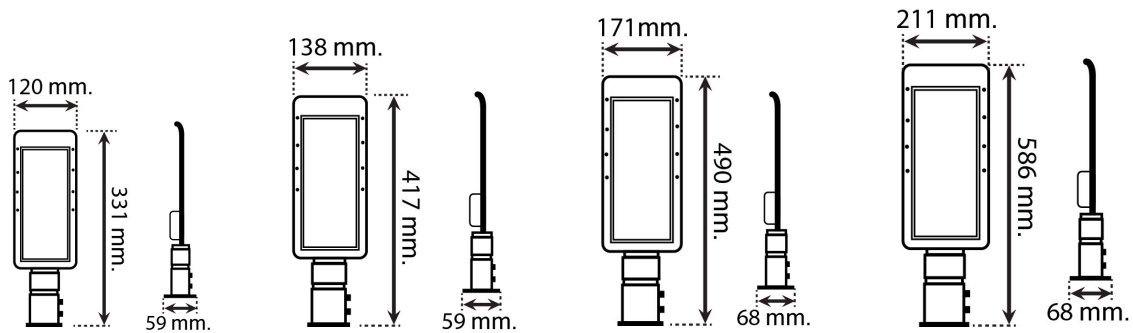

Parameter	Value			
Model	KSTG30W	KSTG50W	KSTG100W	KSTG150W
Rate Power	30W	50W	100W	150W
Luminous Flux	3,000lm	5,000lm	10,000lm	15,000lm
Luminous Efficiency	100lm/w			
Color Temperature	CCT 3000K/4000K/6500K			
Color Rendering Index	>80 Ra			
Input Voltage	AC 170-265 VAC , 50/60Hz			
Power factor	>0.95			
Beam Angle	70°*140°			
Work Temperature	-20°C to +50°C			
Work Life	>35,000 Hours			
Shape	Square			
IP Rating	IP65			
Dimensions	331*120*59 mm	417*138*59 mm	490*171*68 mm	586*211*68 mm