



BULB LIGHT

SERIES KBL-SPECIAL

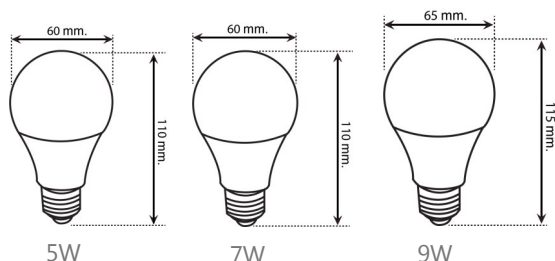

- ◆ Scope of Applications
Accent Lighting, General Lighting, etc. Indoor use only
Non-scaled fixture only, Improper use Will result voided warranty
High Efficiency
THDi <10%



Parameter	Value		
Model	KBLS025W60	KBLS027W84	KBLS029W1080
Rate Power	5W	7W	9W
Luminous Flux	600lm	840lm	1080LM
Luminous Efficiency	120 lm/W		
Color Temperature	CCT 2700/3000K/4000K/6500K		
Color Rendering Index	> 80 Ra		
Input Voltage	AC 176-265 VAC , 50/60Hz		
Power factor	> 0.98		
Total harmonic Current	<10%		
Beam Angle	180°		
Work Temperature	-40°C to +50°C		
Work Life	>15,000 Hours		

KBL-02 = NON-DIM