


INDUSTRIAL LIGHT




FLOOD LIGHT SERIES KFD-L

- ◆ High performance design with multi-chips Package 5050 LED source and Exclusive Lens to satable per-formance, low light failure and no dead light
- ◆ High pressure die cast aiuminium alloy housing.
- ◆ Anti-corrosion with electrophoresis process.

10W -200W

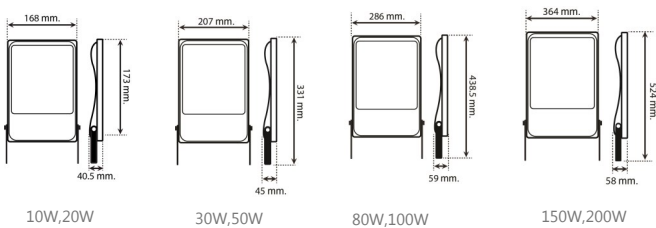

Parameter	Value							
Model	KFDL10W	KFDL20W	KFDL30W	KFDL50W	KFDL80W	KFDL100W	KFDL150W	KFDL200W
Rate Power	10W	20W	30W	50W	80W	100W	150W	200W
Luminous Flux	1,300lm	2,600lm	3,900lm	6,500lm	10,400lm	13,000lm	19,500lm	26,000lm
Luminous Efficiency	130lm/w							
Color Temperature	CCT 3000K/4000K/5000K/5700K							
Color Rendering Index	> 80 Ra							
Input Voltage	AC 100-277 VAC , 50/60Hz							
Power factor	> 095							
Beam Angle	120x90° / 120°x65°/ 60°							
Work Temperature	-20°C to +50°C							
Work Life	>50,000 Hours							
Heat sink	Aluminum							
IP Rating	IP65							
Net Weight	0.69 kg		2.32 kg		5.16 kg		7.58 kg	
Dimensions	173*168*40.5 mm		331*207*45 mm		438.5*286*59 mm		524*364*58 mm	

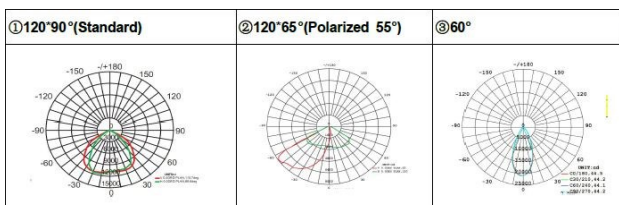

www.kbmlighting.com